



Self-contained ice maker - Granular system
Daily production up to 270 lbs

Hotel	██████████
Restaurant	██████████
Fast food	██████████
Bar	██████████
Disco	██████████
Fish market	██████████
Supermarket	██████████
Medical & SPA	██████████
Industry	██████████

► Position n°



► Features & Plus

- Granular ice - 80-82% dry
- 1l (water) - 1kg (ice) - only Air cooled
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Adjustable Stainless Steel feet
- AISI 304 SS evaporator
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- Dust-proof water basin
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Automatic water charge




AISI 304 SS Scotch Brite finish



AISI 304 SS evaporator



Dust-proof water basin



Disappearing insulated door

► Prod. 24h

	Air temp.	Water temp.	lbs
🌡️	50° F	50° F	270
	70° F	60° F	250
	90° F	70° F	200

2 Years Warranty
subject to limitations

► Certifications available for this model



Energy Verified
Rendement
Énergétique Vérifié






Ice Flakes

GB 903A 2018



Self-contained ice maker - Granular system Daily production up to 270 lbs

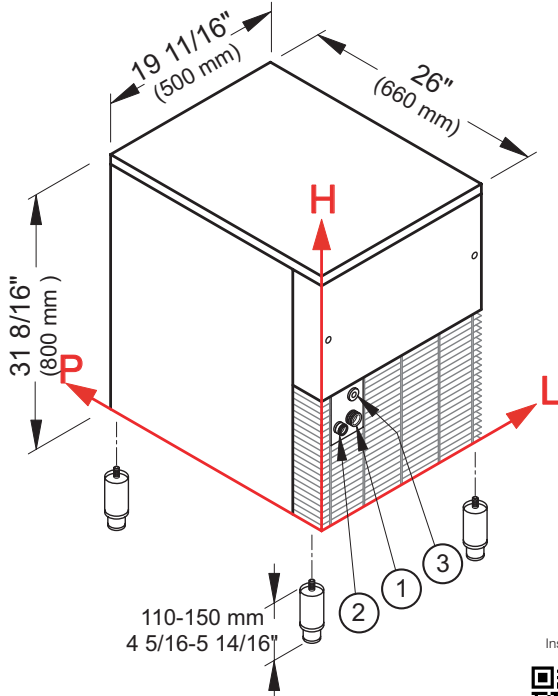

Installation



► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+50° F	+110° F
Water temperature	+37° F	+90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 3 14/16" - 6 4/16" - 3/4"
- ② Water out.: 1 14/16" - 5 15/16" - 15/16"
- ③ Electrical connections: 3 7/16" - 9 1/16"

► Technical information

Production in 24h	200 lbs	Water consumption	12 gal/100 lbs
Store capacity, up to	66 lbs	Sizes (L-P-H in)	19 11/16 - 26 - 31 8/16
Cooling system	A	Sizes with pack (L-P-H in)	21 10/16 - 28 6/16 - 39
Refrigerant	R404A	Net weight	148 lbs
Standard voltage	115 V ~ 60 Hz	Gross weight	168 lbs
Average power consumption	550 W	Finish	AISI 304 stainless steel, scotch brite
Fuse	15 A		

All the technical information must be considered at the following conditions:
 Sizes without feet
 Standard Cube (18 g)
 Production at Ambient temperature +90° F / Water temperature +70° F
 Water consumption at Ambient temperature +90° F / Water temperature +70° F
 Average power consumption at +109° F

Models and specifications are subject to change without notice

Rev. 03 - Issued May 2018



www.bremaice.it
info@bremaice.it

Bim + Data
download

