SPEC SHEETS MODEL: VC49 PKD

GLASS DOOR REFRIGERATOR

Product Features

- Easy access to the engine for cleaning
- Double glass door, offers greater insulation and resistance which helps optimize the use of energy
- Your food always fresh and at the ideal temperature
- Advertising display You can place promotions of your business to increase your sales
- Door with self closing
- Automatic / night mode, helps reduce energy consumption
- Stainless steel floor, much more hygienic and easy to clean
- Best exhibition thanks to its adjustable grills
- LED lighting inside the refrigerator
- Coolant friendly to the environment

Accesories

- Gravity kits, sandwich trays and freezer baskets
- Casters and leveling leg
- Preparation for heavy duty wheels for easy displacement (sold as accessory does not include installation)

Product highlights









Space for advertising

Certifications

Stainless steel floor







Warranty

- 2 Years Parts and labor
- 3 Years compressor coverage

Residential: Assumes on liabillity for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.





RO-KOLD

PRODUCT SPECIFICATIONS MODEL: VC49 PKD

PRO-KOLD

Plan view

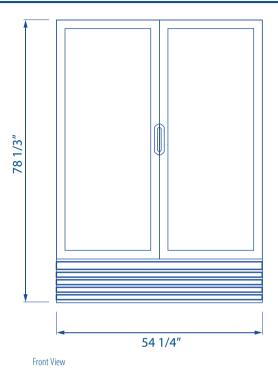

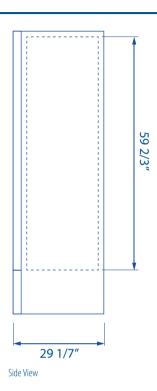

Technical data

Dimensions

External Dimensions	H 78 1/3" W 54 1/4" D 29 1/7"
Internal Dimensions	H 59 2/3" W 50" D 24 5/6"
Usable Internal	H 53 5/7" W 49 2/3" D 20 2/5"
Net volume	41.67 ft3 1180 lts
Net Weight	472.89 Lbs.
Gross weight	485.02 Lbs.
Packaging dimensions	H 82 1/6" W 54 5/7" D 29 2/3"

Performance data

Refrigerant charge	3.52 oz
Energy consumption	3.29 kwh/24h
Compessor power	1/2 hp
Condenser	Finless
Evaporator	Dynamic
Thermostat Setting	Cut-out 32F 0C Cut-out 44.6F 7C

Construction

Exterior material	Coated steel
Interior material	Aluminum
Door type	Glass sliding

Electrical data

Power supply	115v/ 60 Hz
Amps	6.6
Cord d Lenght	118" 3000 mm
Lighting	180 LUX 4 modules
	18 LED per module
Plug type	NEMA 5-15P
Controller	ERC

Cooling

Temperature range	33°F - 40°F
Refrigerant	R290
Max. ambient temperature	90° F
Defrosting	Automatic
Temperature controller	Digital
Horsepower	1/2

Logistic data

Trailer Loads	53′:33 40′:25
Unit Weight with packaging	472.9 lb 214.5 kg
Dimensions with packaging	H 82 1/6" W 54 5/7" D 29 2/3"