PRO-CUT

SPEC SHEET

STANDARD FEATURES

- Powerful 3 HP motor to increase productivity
- Hose down washable
- Food grade stainless steel construction
- Razor sharp 120" band saw blade
- 220 volts three phase electrical connection
- Direct belt driven transmission
- Includes last push plate for safety operation
- Cuts through all kinds of meats
- Cutting clearance 13.4" x 18.2" (W x H)
- Safety proximity magnetic switches
- Includes motor protector
- Includes waste tray
- Disconnect switch for safety maintenance
- Adjustable legs
- Removable wheel and scrap cleaners

www.pro-cut.us



PRODUCT HIGHLIGHTS



Stainless steel construction



Waste Tray



Included accessories



Disconnect switch



Proximity switch



Motor protector






1 year parts and labor



SPEC SHEET

www.pro-cut.us

PLAN VIEW

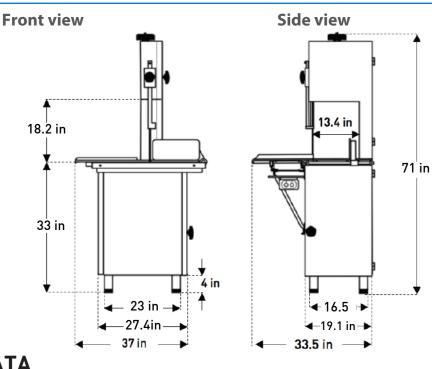



TECHNICAL DATA

Dimensions

External dimensions (in)	L:33.5 " W:37 " H:71 "
Net weight	429.89 lb (195 kg)
Power cord length	5.9 ft

Construction

Body construction	Stainless steel
Bands saw blade	Steel 1075

Logistic d ata

Max number of SKU per pallet	1
Shipping dimensions per unit	L: 34" W: 38" H: 79"
Shipping weight per unit	496 lbs
Shipping dimensions full pallet	L: 34" W: 38" H: 79"
Shipping weight full pallet	496 lbs

Electrical data

Motor	3 HP
Volts / Frequency	220 Vac / 60 Hz
Amps	13.4
Watts	2200
Phase	3
Type of plug (NEMA)	L15-20P

Performance

Work area	891 in ²
Throat width	13.4 in
Throat height	18.2 in
Blade speed	104 ft / s velocity band saw
Saw length	120 in

Accessories

Band saw (CBT)	
CBT-322-120-5/8"	Heat tempered - 3TPI - 120" lenght - 5/8" width