

4-SIDED COUNTERTOP GLASS DOOR MERCHANDISERS

 MODEL: MECR-31D MECR-32D


MECR-31D



MECR-32D


Maxx Cold Countertop Glass Door Merchandisers are designed to provide the user with maximum storage, energy savings and cold, accurate temperatures. Our countertop models allow for easy accessibility, optimum capacity and flexibility for quick and efficient food product presentation.

FEATURES AND CONSTRUCTION

- Durable, corrosion resistant black painted steel and stainless steel exterior with black plastic trim
- Easy to clean, low maintenance ABS interior
- Dual pane tempered glass doors and sides prevent heat loss and minimize condensation
- Interior LED lighting
- Digital controls deliver precise temperature regulation
- Internal bottom mounted compressor with flow through ventilation to cool the utility compartment
- Manual defrost cycle maintains ideal storage conditions
- Internal condensate evaporator pan included, so no drain connection is needed
- Flat top accommodates POP or other marketing displays
- Three (3) heavy-duty, adjustable chrome-plated wire shelves
- 2" legs (two front adjustable leveling legs)

ELECTRIC

115V / 60Hz / 1Ph
 (230V / 50-60Hz / 1Ph is available as an option)
 6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



DOE 2017 Compliant

MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Ice for warranty statement at
 TechnicalServices@TheLegacyCompanies.com or 877.368.2797

NOMINAL STORAGE CAPACITY

MECR-31D/32D 3 Cu Ft (85 L)


TEMPERATURE

Holding temperature 33°F to 54°F (1°C to 12°C)

- Temperature can be displayed in Celsius or Fahrenheit

MECR-31D

MECR-312D

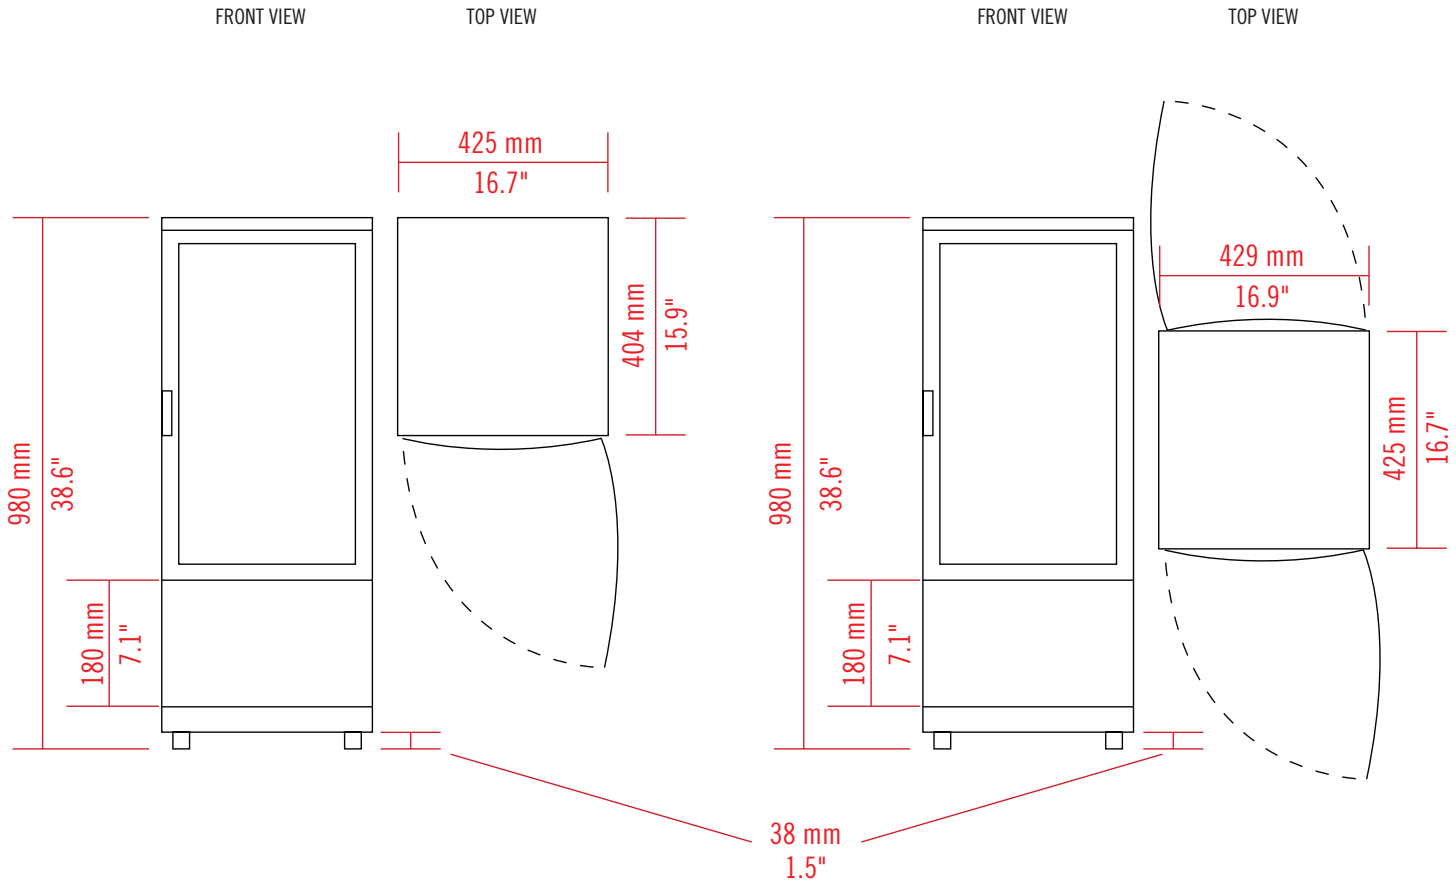

MODEL	EXTERNAL DIMENSIONS	NOMINAL CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
MECR-31D	16.7" x 15.9" x 38.6" (425 x 404 x 980 mm)	3 Cu Ft (85 L)	33°F to 54°F (1°C to 12°C)	2.0A	84.9 lbs (38.5 kg)	R-290A 1.41 oz (40 g)	1 / 3	115V / 60Hz / 1Ph
MECR-32D	16.7" x 15.9" x 38.6" (425 x 404 x 980 mm)	3 Cu Ft (85 L)	33°F to 54°F (1°C to 12°C)	2.0A	86 lbs (39 kg)	R-290A 1.41 oz (40 g)	2 / 3	115V / 60Hz / 1Ph

INSTALLATION

- Recommended minimal side clearance for each door is 18". For closed sides, recommended clearance is 3".
- Optional 6" leveling legs are available for floor-mounted applications