

GLASS DISPLAY CHEST FREEZER MERCHANDISERS

- Model: MXF25CHC-2 MXF32CHC-3 MXF40CHC-4 MXF48CHC-5
 MXF54CHC-6 MXF64CHC-7 MXF72CHC-8


International Model:
 Add -50 (220V/50Hz/1Ph) or
 -60 (220V/60Hz/1Ph)



MXF32CHC-3



MXF48CHC-5

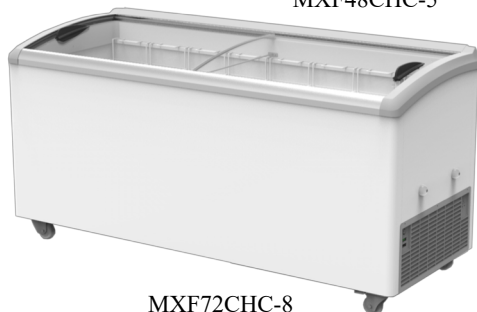

MXF72CHC-8

This line of Glass Display Freezer Merchandisers offer a spacious interiors that allow you to store ice cream and frozen novelties in an elegant presentation, with size options to meet your specific application requirements. Capacities range from 3.8 to 14.3 cubic feet (108 to 405 liters). Each unit has thick wall insulation and a white powder coated finish for easy cleaning.

FEATURES

- Clear, curved glass sliding lids
- Easy grip sliding lid handle
- Lid lock and keys
- Interior LED lights makes it easier to see selection and enhance product's appearance
- Molded plastic lid frame heated to prevent frost or ice build-up
- Internal condensate evaporator pan. No need for a floor drain.
- Heavy-duty casters
- Removable rubber bumper guards, side grill

TEMPERATURE

- Adjustable temperature range -18°F to +10°F (-28°C to -12°C)
- Thermometer display: external, analog, easily read

CONSTRUCTION

- Exterior Material: durable, white zinc coated, baked on enamel steel
- Interior Material: painted white power coated steel
- Flat wire baskets with 3 compartments
- Insulation: Thick, 2.5" foamed in-place, environmentally friendly, polyurethane
- Reliable, easily maintained cold wall system is incorporated

REFRIGERANT

- Environmentally Friendly R290-a Propane

ELECTRIC

- 115/120V/60Hz/1-ph, NEMA 5-15P
- 6-1/2 ft power cord and plug set



Intertek
 Certified to
 ANSI-NSF 7



Certified to
 ANSI UL 471



DOE 2018
 Compliant



2020
 Compliant

Maxx Cold X-Series WARRANTY (USA / CANADA)

One (1) year parts
 One (1) year on-site labor
 Four (4) years compressor (part only)
 Administered by The Legacy Companies, 877.368.2797



Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.

By using the information provided, the user assumes all risks in connection with such use.



The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Maxx Product will deliver years of trouble free, reliable, low maintenance, efficient operation.

GLASS DISPLAY CHEST FREEZER MERCHANDISERS

MXF25CHC-2



MXF32CHC-3 / MXF40CHC-4 / MXF48CHC-5 / MXF54CHC-6 /
 MXF64CHC-7 / MXF72CHC-8

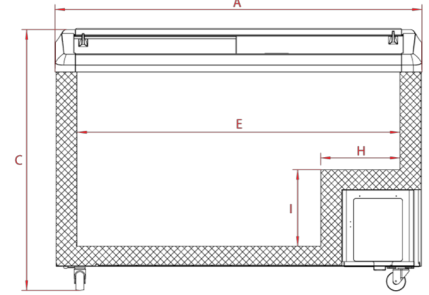

MODEL	EXTERNAL DIMENSIONS				INTERNAL DIMENSIONS				
	A	B	C	D	E	F	G	H	I
MXF25CHC-2	24.6 in 625mm	27.6 in 700 mm	32.6 in 828 mm	3 in 76.2 mm	18.5 in 470 mm	21.7 in 550 mm	18.9 in 480mm	8.7 in 220 mm	9.7 in 245
MXF32CHC-3	31.5 in 800 mm	27.5 in 697 mm	33.5 in 850 mm	3 in 76.2 mm	25.8 in 656 mm	20.9 in 530 mm	19.6 in 498 mm	10.2 in 260 mm	9.8 in 250 mm
MXF40CHC-4	39.4 in 1000 mm	27.5 in 697 mm	33.5 in 850 mm	3 in 76.2 mm	33.7 in 856 mm	20.9 in 530 mm	19.6 in 498 mm	10.2 in 260 mm	9.8 in 250 mm
MXF48CHC-5	47.4 in 1204 mm	27.5 in 697 mm	33.5 in 850 mm	3 in 76.2 mm	41.7 in 1060 mm	20.9 in 530 mm	19.6 in 498 mm	10.2 in 260 mm	9.8 in 250 mm
MXF54CHC-6	53.2 in 1350 mm	27.5 in 697 mm	33.5 in 850 mm	3 in 76.2 mm	47.5 in 1206 mm	20.9 in 530 mm	19.6 in 498 mm	10.2 in 260 mm	9.8 in 250 mm
MXF64CHC-7	63.4 in 1610 mm	27.5 in 697 mm	33.5 in 850 mm	3 in 76.2 mm	57.7 in 1466 mm	20.9 in 530 mm	19.6 in 498 mm	10.2 in 260 mm	9.8 in 250 mm
MXF72CHC-8	71.7 in 1820 mm	27.5 in 697 mm	33.5 in 850 mm	3 in 76.2 mm	66 in 1676 mm	20.9 in 530 mm	19.6 in 498 mm	10.2 in 260 mm	9.8 in 250 mm

MODEL	ELECTRICAL POWER	NET VOLUME CuFt (L)	REFRIGERANT	NET WEIGHT Lbs (kg)	HORSEPOWER HP (W)	NEMA PLUG
MXF25CHC-2	115V/60Hz	3.81 (108)	R600a	103.6 (47)	1/9 (89)	5-15P
MXF32CHC-3	115V/60Hz	4.87 (138)	R290a	114.6 (52)	1/7 (118)	5-15P
MXF40CHC-4	115V/60Hz	6.71 (190)	R290a	130.1 (59)	1/5 (150)	5-15P
MXF48CHC-5	115V/60Hz	8.62 (244)	R290a	152.1 (69)	1/4 (186)	5-15P
MXF54CHC-6	115V/60Hz	9.96 (282)	R290a	165.4 (75)	1/4 (186)	5-15P
MXF64CHC-7	115V/60Hz	12.36 (350)	R290a	187.4 (85)	1/4+ (232)	5-15P
MXF72CHC-8	115V/60Hz	14.30 (405)	R290a	231.5 (105)	1/2 (340)	5-15P