



Maxx Cold Select Series | The Legacy Companies
 3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331
 (954) 202-7419 • Fax (954) 202-7337 • (877) 600-8401
 www.MaxximumFoodService.com • Info@MaxxColdFoodService.com

Project Name: _____
 Location: _____
 Item #: _____ Qty: _____
 Model: _____

UNDERCOUNTER FREEZERS

Model: MXSF29U 1 Door MXSF48U 2 Door MXSF60U 2 Door

International Model:
 Add -50 (220V/50Hz/1Ph)



MXSF29U



MXSF48U



MXSF60U

Maxx Cold Select Series Undercounter Freezers are designed for performance – holding your products at their ideal storage conditions. These undercounter freezers make the most of available space and provide excellent service. The stainless steel exterior provides durability and ensures years of reliable service if properly maintained. The unit's foam insulation and forced air cooling system deliver an outstanding food storage environment.

FEATURES

- Easy to grip, stainless steel, self-closing doors with integrated door handles
- 4 Casters (2 locking, 2 non-locking)
- Adjustable shelves (one per section/door)
- Integrated condensate evaporator pan eliminates the need for a floor drain connection
- Available in various sizes to suit your spatial and storage volume application requirements

TEMPERATURE

- Holding temperature: 0° to 10°F (-18° to -23°C)
- Utilizes environmentally friendly refrigerant R290A
- Efficient, forced-air refrigeration system delivers even temperature regulation throughout the food storage compartment
- Automatic defrost system to maintain peak performance
- Readily adjustable solid state control scheme with digital temperature display
- Oversized refrigeration and efficient foam insulation provide for rapid recovery and excellent temperature regulation

CONSTRUCTION


- Exterior Material: Durable, easy to clean stainless steel
- Interior Material: Easy to clean painted aluminum
- Environmentally friendly, CFC-free urethane foam insulated walls and doors
- Heavy duty epoxy coated shelves for easy access and minimal maintenance without disrupting air flow
- Rear-accessed utility compartment provides space efficiency as well as easier servicing while conserving energy consumption
- Easily replaceable dart-style magnetic compression gaskets

REFRIGERANT

Environmentally-friendly R-290A, with the lowest global warming potential value (3) of any commercially available refrigerant

ELECTRIC

115/60Hz/1 Ph (NEMA 5-15)
 (additional voltage options are available)
 Cord set includes plug & 9.8' (3m) cord



NEMA 5-15P



Certified to
 ANSI NSF 7



Certified to
 ANSI UL 471



DOE 2017
 Compliant


Maxx Cold Select Series WARRANTY (USA / CANADA)

One (1) year parts
 One (1) year on-site labor
 Four additional (4) years compressor (part only)
 Administered by The Legacy Companies, 877.368.2797
 24/7 tech support provided

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Maxx Product will deliver years of trouble free, reliable, low maintenance, efficient operation.

UNDERCOUNTER FREEZERS

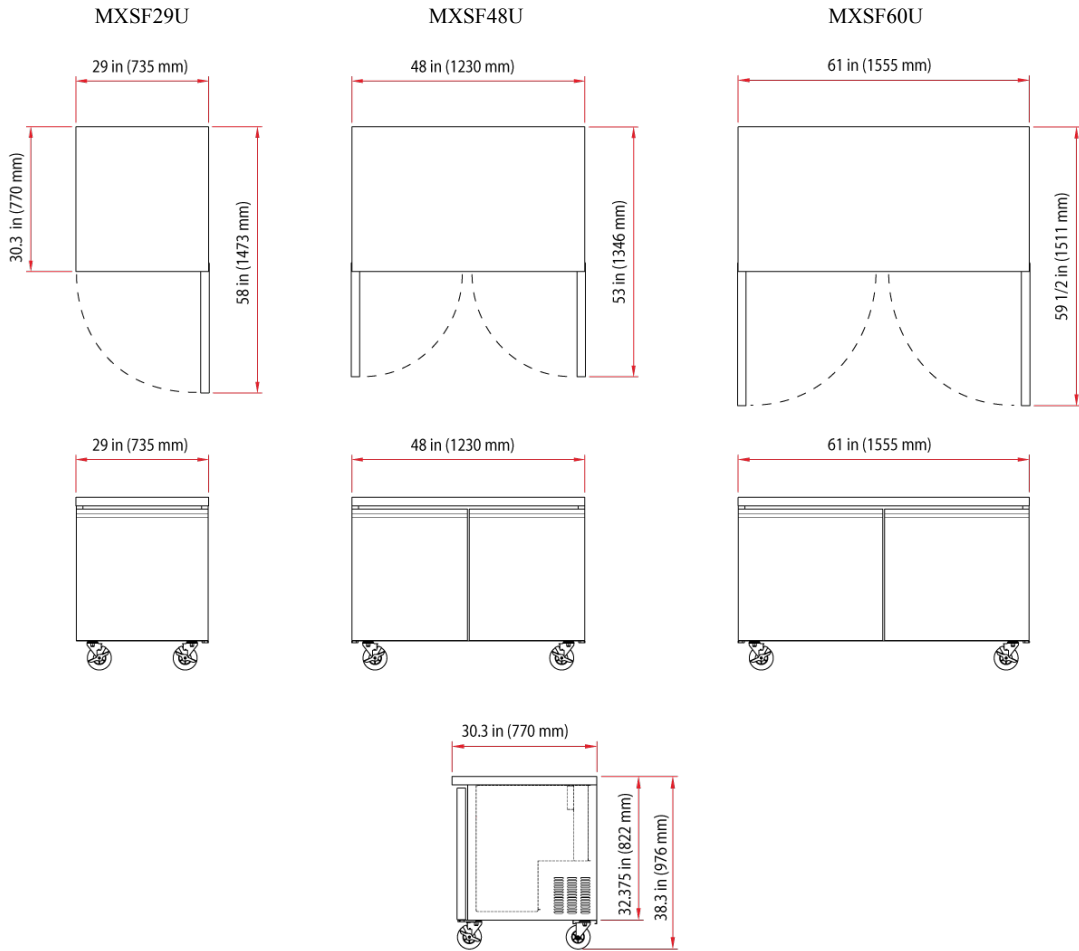

*Shorter or taller optional caster sets are available to suit your application requirements

	Exterior Dimensions in / mm	Interior Dimensions in / mm	Depth With Door(s) Open in / mm	Capacity	Temperature Range	Voltage	Average Amp Draw	Shelves	Unit Weight
MXSF29U	29 x 30.3 x 38.3 735 x 770 x 976	24 x 23.4 x 26.6 610 x 636 x 676	58 / 1473	6.7 Cu Ft 184 L	0° to 10°F -18°to -23° C	115V/60Hz	3.6	1	145 lb 66 kg
MXSF48U	48 x 30.3 x 38.3 1230 x 770 x 976	43 x 23.4 x 26.6 1105 x 636 x 676	53 / 1346	11.1 Cu Ft 340 L	0° to 10°F -18°to -23° C	115V/60Hz	5.6	2	244 lb 111 kg
MXSF60U	61 x 30.3 x 38.3 1555 x 770 x 976	56 x 23.4 x 26.6 1430 x 636 x 676	59.5 / 1511	14.1 Cu Ft 439 L	0° to 10°F -18°to -23° C	115V/60Hz	8.2	2	268 lb 122 kg

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.