

3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331 Sales: (954) 202-7419 • Sales@TheLegacyCompanies.com Tech Service: (877) 368-2797 • Service@MaxxHelp.com

Project N	ame:			
Location:				
Item #:	Qty:			
Model:				
www MaxximumFoodService com				

SELECT SERIES SOLID CHEST FREEZERS

MXSH9.6S MXSH12.7S MXSH15.9S International Model: Add -50 (230V/50Hz/1Ph) or -60 (230V/60Hz/1Ph) Model: MXSH9 6S

MXSH12.7S




MXSH15.9S

REFRIGERANT

CFC & HCFC free R-134A

ELECTRIC

115V/60Hz/1 Ph (NEMA 5-15P) Comes with a 6' (1.85m) Cord Set



NEMA 5-15P

Maxx Cold Select Series solid hinged lid chest freezers are an excellent option for safely storing frozen food products such as meat, packaged foods, ice cream, vegetables, desserts and bags of ice while keeping them at the ideal storage temperature for extended life, maintaining quality and taste, preventing freezer burn and development of ice crystals. The stored product is easily accessible when it's time to use any of the contents. The included interior storage basket(s) helps you organize your products, so you can quickly locate and retrieve what you need. The refrigeration system is oversized so this unit can be used safely in a garage even if the temperature drops to 0°F or rises above 100°F. The hinged lid includes a lock and key to prevent unauthorized access to the contents. The freezer is sized to pull down its contents temperature level if loaded with pre-chilled products (recommended loading temperature for all products is $\leq 41^{\circ}F/5^{\circ}C$). The freezer design will provide years of reliable operation if properly maintained.

FEATURES

- Sturdy hinged top opening lid that opens up to 90° makes access and servicing the freezer easy
- Includes lock to provide security even if unattended
- Utilizes CFC & HFC free R-134A refrigerant
- Adjustable feet or caster wheel options available
- White wire storage basket(s) included for easy product organization:
 - MXSH9.6S & MXSH12.7S: One (1)
- MXSH15.9S: Two (2)
 Can hold the contents safely for 2 days in case of a power outage

TEMPERATURE

- Holding temperature: 0° to 11°F (-24° to -18° C)
- Readily adjustable temperature set point (factory set at 5°F / -15°C)
- Rapid temperature recovery after opening lid
- Chest freezers hold frozen foods better than upright freezers as the cold air is retained in the storage compartment even if the lid is not fully closed

CONSTRUCTION

- Exterior Material: White powder coated steel
- Interior Material: Aluminum
- Flat top-opening insulated lid with integrated external handle
- 3" of environmentally friendly foam insulation can hold the stored contents safely for 2 days in case of a power outage
- Oversized yet energy efficient refrigeration system meets 2017 DOE requirements and its rapid recovery capability results in approval of using these models for commercial applications
- Cold wall construction for even temperature profile in the chest freezer
- Manual defrost capability is provided to keep the walls frost-free and deliver the coldest possible contents
 Interior storage compartment is made from corrosion resistant materials







DOE 2017 Compliant

Maxx Cold Select Series WARRANTY (USA / CANADA)

One (1) year parts

One (1) year on-site labor

Four (4) years compressor (part only)

Administered by The Legacy Companies, 877.368.2797


Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.




The Legacy Companies
3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331
(954) 202-7419 • Fax (954) 202-7337 • (877) 600-8401
www.MaxximumFoodService.com • Info@MaxxColdFoodService.com

SELECT SERIES SOLID CHEST FREEZERS

MXSH9.6S 33.625 in 854 mm 40.6 in 1030 mm

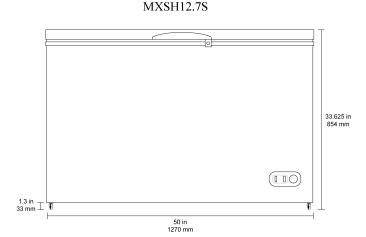

MXSH15.9S 33.625 in 854 mm 1.3 in 33 mm I 60.2 in 1530 mm



	MXSH9.6S	MXSH12.7S	MXSH15.9S
In: External Dimensions W x D X H	40.6 x 29.7 x 33.625	50 x 29.7 x 33.625	60.2 x 29.7 x 33.625
mm: External Dimensions W x D X H	1030 x 755 x 854	1270 x 755 x 854	1530 x 755 x 854
Capacity	9.6 Cu Ft / 272 L	12.7 Cu Ft / 360 L	15.9 Cu Ft / 450 L
Manual Defrost	Yes	Yes	Yes
Voltage / Frequency	115V/60Hz	115V/60Hz	115V/60Hz
Average Amp Draw (Watts)	0.6 (105)	0.8 (125)	0.85 (145)
Temperature Range F°/C°	0° to 11° F -24° to -18° C	0° to 11° F -24° to -18° C	0° to 11° F -24° to -18° C
Factory Temperature Setting	5°F (-15°C)	5°F (-15°C)	5°F (-15°C)
Unit Weight	119 lb (54 kg)	132 lb (60 kg)	165 lb (75 kg)
Shipping Weight	136.7 lb (62 kg)	152.1 lb (69 kg)	185.2 lb (84 kg)

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.

While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.

By using the information provided, the user assumes all risks in connection with such use.