

| Project Name: |      |
|---------------|------|
| Location:     |      |
| Item #:       | Qty: |
| Model:        |      |

# MIM130 SELF-CONTAINED ICE MACHINE

**MODEL:** 

MIM130



The MIM130 self-contained, air-cooled ice machine is perfect for any free-standing or built-in application. Each unit features a self-contained storage bin and a durable, easy to clean stainless steel and black plastic trim exterior. The easy-to-use controls, front-breathing design with vertical evaporator and proven ice making technology will deliver years of reliable ice production.

#### FEATURES AND CONSTRUCTION —

- Stainless steel exterior with black plastic trim
- Air cooled compressor
- Programmable, solid state, digital electronic control system.
- Built-in self cleaning mode
- Automatic shut off / overflow protection
- Includes scoop
- Includes tubing for supply and drain lines

#### DAILY ICE PRODUCTION —

Air Temp 70°F (21°C) / Water Temp 50°F (10°C) 

Air Temp 90°F (32°C) / Water Temp 70°F (21°C) 

# ICE BIN STORAGE CAPACITY —

MIM130......35 lbs (15.9 kg)

## **OPERATING REQUIREMENTS —**

Ambient Air Temperature Range..... 50° to 100°F (10° to 38°C) Water Temperature Range ...... 41° to 90°F (5° to 32°C)

Water Usage per 100 lbs of ice...... 21 Gallons (79L)

Water Supply Line Connection ...... 3/8" FPT

Water Pressure Range:

Max PSI ......80\* Min PSI...... 15 Min Bar ..... 1.0 Max Bar.....5.5

\*Above 80 PSI requires a regulator

Energy Consumption per 100 lbs of ice:

MIM130......11.82 kWh/100 lbs

#### **ELECTRIC** -

115V / 60Hz / 1Ph (230V / 50-60Hz / 1Ph is available as an option) 6' (2m) NEMA 5-15P cord set inculded



## **3RD PARTY APPROVALS**









Zero Ozone Depletion Potential


DOE 2018 Compliant


Certified to ANSLINSE 12


Certified to ANSI UL 563


# MAXX ICE WARRANTY (USA / CANADA)


Contact Maxx Ice for warranty statement at TechnicalServices@TheLegacyCompanies.com or 877.368.2797 FRONT VIEW SIDE VIEW

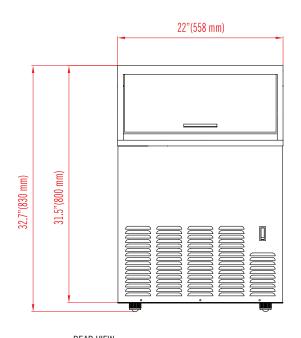


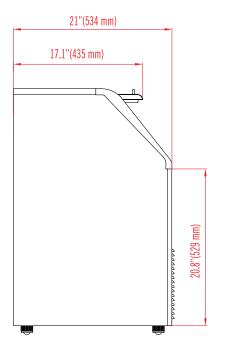

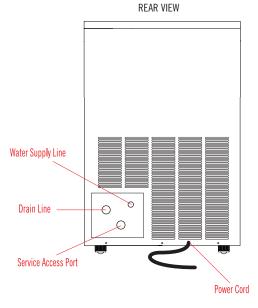







| MODEL  | EXTERNAL<br>Dimensions                    | DAILY<br>ICE PRODUCTION<br>(70°F Air / 50°F Water) | ICE BIN<br>Storage cpacity | NET WEIGHT /<br>Shipping Weight      | AMP DRAW<br>(nominal/max) | REFRIGERANT<br>And Charge Size | ELECTRICAL        |
|--------|---|--|----------------------------|--------------------------------------|---------------------------|--------------------------------|-------------------|
| MIM130 | 22" x 21" x 32.7"<br>(558 x 534 x 830 mm) | 130 lbs (59 kg)                                    | 35 lbs (15.9kg)            | 106 lbs (48 kg)<br>129 lbs (58.5 kg) | 7.5A / 11.8A              | R-134a<br>9.17oz (260g)        | 115V / 60Hz / 1Ph |

## **INSTALLATION** -

- A clearance of 2" from the wall is recommended to promote adequate cooling air circulation
- A gravity drain line is required to install this ice machine
- For optimal performance, the use of a water filter is recommended